




•		3
		4
		4
		5
•		7
		8
		8
		10
•		17
		18
		27
		28
		29
		32
		33
		34
		34
		36
SQL		36
		37
		60
		62
		63


		67
USL		69
		71
		72
		76
		79






, 가 .


가 .




가

Manual	Description
Getting Started	
가	
가	
가	가





‘ ‘ ‘
.



가 .

(Scripted Query)

‘

.

.

가
가

가

가

■

-

-


-

-

가

-

(),



) → → →

■

가 가 가
가 , 가



/ ,


가

■

-

가 5 ,

가 10

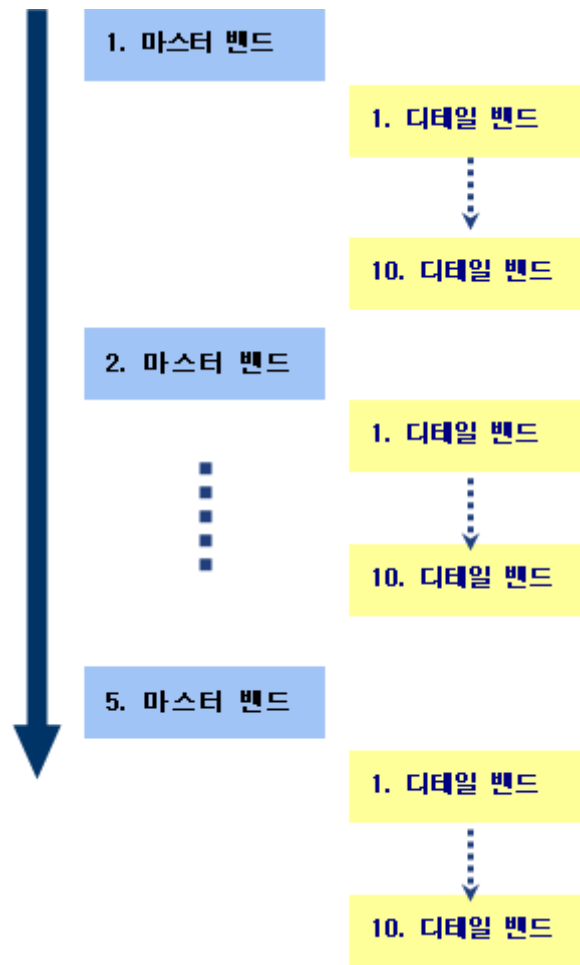

가 ,


.

[

] / [] . []
 , []

. []

2

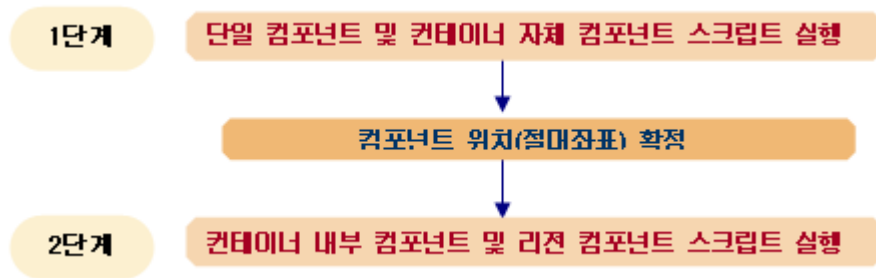

■

가
) : 1 → 2 → 1
 : [1] 1 → 2 → 1

■

가
 2 가
 [1]
 [2]
) : 1 → 1 → 1 → 2
 : [1] 1 → 1 → 1 → 2
 [2] 1 → 1


■


()

가 가
 가 , 가 2
 1) : 1 → 2
 : 1 → 1 → 2 → 2

—

()가 . 1
 , 2
()
가
 .





C 가 .
.

```
// Comment
/* Comment */
"//"
"/" */
```

■ **int : 32 bit (decimal)**

: 0

: -2,147,483,648 ~ 2,147,483,647

) i = 126; // Ok : decimal '126'

i = 0; // Ok : i = zero

i = 00; // Error : oct

i = 0x666; // Error : hex

■ **double : ()**

: 0

: -(+)4.94065645841246544E-324

: - (+)1.79769313486231570E+324

: 15 ~ 16

) f = 10.00;

f = 1E1;

■ **boolean :** ('true' or 'false')

: false

■ **string :**

: ""(Null String)

'\'

) : " \t"

: " \n"

: " \r"

: "\\" \\""

: \+8 : "\177"(0~255 가)

■ **Date :**

:

G	Year designator	Text	AD
y	Year	Number	1996
M	Month in year	Text or Number	July or 07 ()
d	day in month	Number	10
h	hour in am/pm (1~12)	Number	12
H	Hour in day (0~23)	Number	0
m	Minute in hour	Number	30
s	Second in minute	Number	55
S	Millisecond	Number	978
E	day in week	Text	Thu (' ')
D	day in year	Number	189
F	day of week in month	Number	2 (2nd Wed in July)
w	Week in year	Number	27
W	Week in month	Number	2
a	am/pm marker	Text	PM
k	hour in day (1~24)	Number	24
K	hour in am/pm(0~11)	Number	0

z	Time zone	Text	Pacific Standard Time
'	Escape for text	Delimiter	'
"	Single quote	Literal	"

)

date_ EEE, MMM d, "yy	Wed, July 10, '96
date_ h:mm a	12:08 PM
date_ hh 'o'clock' a, zzzz	12 o'clock PM, Pacific Daylight Time
date_ K:mm a, z	0:00 PM, PST
date_ yyyy' 'MM' 'dd' 'EEE' '	2001 11 01
date_ yy	01
date_ yyyy	2001
date_ E	()
date_ EEE	Wed (USA)

■

가

.

: ;

: global ;

.

- , , (Underline) .
- .
- , .
- .

.

- ()

.

■ ()
가
가 .

- 0, . ,

int i = 126; // Error :

- "..."

global int a;

::a = 1;

:

```
global string strMsg;
::strMsg = "Hello";
```

가 .

```
...
function GetGlobal(){
var str;
str = document.OZReportViewerID.Document.GetGlobal('strMsg');
alert(str);
}
...
<input type="button" value="GetValue" onClick="GetGlobal()">
...
```

"OZReportViewerID"

Object ID

```
...
<OBJECT ID = "ozrviewer" CLASSID="CLSID:
...
```

```
...
document.ozrviewer.Document.GetGlobal('strMsg');
...
```



- null

null

, null

If (#ODI.Dataset.fieldName# == null)

{ /* Null */

}

가

	+	/ (Concatenation)
	-	/ (Unary operator)
	*	
	/	
	%	(Modules)
	=	
	==	
	!=	
	<	
	<=	
	>	
	>=	
	&	AND(int 가)
		OR(int 가)
	^	XOR(int 가)
	~	(int 가)

	&&	AND(boolean 가)
		OR(boolean 가)
	!	(boolean 가)

- " > > > "
- *, /, %가 가 +, - 가 가
- boolean .

가 .

int	=, ~, ^, &,
int,double	=, >, <, <=, >=, ==, !=, *, /, +, -, %
boolean	=, ==, !=, !, &&,
string,date	=, ==, !=

double, int, boolean ,

int=	double	
	boolean	true 1, false 0
	string	(decimal)
double=	int	
	boolean	true 1, false 0
	string	(decimal)

boolean=	int	0 false, true
	double	0.0 false, true
	string	true true, false
string=	int	
	double	
	boolean	true true, false false
Date=	double	가
	boolean	가
	string	가

- `boolean` Type
가, double

- `string` Type
가

```

a = ( )b;
string s;
s = "123";
int i = (int)s;
i = (int)"12" + (int)"45"; // i = 57
s = (string)12 + (string)45; // s = "1245"

```

- `Date` Type
(parseDate, formatDate)

■ if-else

Statement가

```

{ }
if (expression) {

```

```

        statement ;
    } else if (expression) {
        statement ;
    } else {
        statement ;
    }
}

```

■ while

```

        true
        { }
while (expression) {
    statement ;
}

```

가 "##" , ODI , , ,

■

```

#ODI . #
) ODI Car, Order, Region
string FieldValue;
FieldValue = #Car.Order.Region#;

```

: ODI 가

■

ODI

■

ODI

ODI

OZ

가

ODI

가

ODI

■ ODI

```
#ODI .OZParam. #
ex) ODI Car, ODI Region
string FieldValue;
FieldValue = #Car.OZParam.Region#;
```

: ODI 가

■

ODI

■

가 OZ 가 ODI 가
ODI


■

```
#OZFormParam. #
ex) Title
string FieldValue;
FieldValue = #OZFormParam.Title#;
```

■

```
#OZSystem. #
ex) 가 PageNumber
string FieldValue;
FieldValue = #OZSystem.PageNumber#;
```

: Page_of_Total, Total_Page



	(, , ,)
	(, , ,)
	(, , ,)
	(, , ,)
	/
SQL	
	/
USL	

- **double abs(double n)**
n
- **double acos(double n)**
n = -1 ~ 1, n arc cosine (0 ~ pi)
- **double asin(double n)**
n = -1 ~ 1, n arc sine (-pi/2 ~ pi/2)
- **double atan(double n)**
n arc tangent (-pi/2 ~ pi/2)
- **double atan2(double n, double m)**
n/m arc tangent (-pi ~ pi)
- **double ceil(double n)**
n 가 ,
ex) ceil(1.4235) → 2.0
- **double cos(double n)**
n cosine
- **double exp(double n)**
e n , e = 2.71828183...
- **double floor(double n)**
n 가 ,
ex) floor(1.4235) → 1.0
- **double log(double n)**
n log
- **max(arg1, arg2)**

argument 가 ,

■ **min(arg1, arg2)**

argument 가 ,

■ **double pow(double m, double n)**

m n

■ **double random(double n)**

0 ~ n

■ **double sin(double n)**

n sin

■ **double sqrt(double n)**

n square root (, n>0)

■ **double tan(double n)**

n tangent

1 0 .
2 byte . , strlenb(), substrb() .

■ **string getchar(string src, int n)**

src n+1

ex) getchar("abcdef", 2) → "c"

ex) getchar("가 ", 2) → " "

■ **string setchar(string src, int n, string dst)**

src n+1 dst

dst 가 2 byte
ex) setchar("abcdef",2, "1") → "ab1def"
ex) setchar("가 ",2, " ") → "가 "

■ **boolean strcmp(string src, string dst)**

src dst가 true, false

■ **boolean stricmp(string src, string dst)**

src dst가 true, false
src dst

■ **int strstr(string str1, string str2)**

str1 str2
ex) strstr("abcdef", "cd") → 2
ex) strstr("가 ", " ") → 2

■ **int strlen(string src)**

src
ex) strlen("abc") → 3
ex) strlen("가 ") → 3

■ **int strlenb(string src)**

src byte
ex) strlenb("abc") → 3
ex) strlenb("가 ") → 6

■ **string strtrim(string src)**

src
strtrim(" a b c d ") → "a b c d"

■ **string substr(string src, int start, int len)**

src start+1 len
substr("abc가 ", 2,3) → "c가 "

■ **string substrb(string src, int start, int len)**

src start+1 len
byte
ex) substrb("abc가 ", 2,3) → "c가"

■ **string strreplace(string src, string mat, string dst)**

src mat dst
ex) strreplace("abcdef", "cd", "가 ") → "ab가 ef"

■ **string strlower(string src)**

src [A-Z]
ex) strlower("ABC") → "abc"

■ **string strupper(string src)**

src [a-z]
ex) strupper("abc") → "ABC"

■ **string strleft(string src, int len)**

src len
ex) strleft("가 abc",3) → "가 a"

■ **string strright(string src, int len)**

src len
ex) strright("가 abc",4) → " abc"

■ **string strshift(string src, int len)**

len src가 len 가 ,
ex) strshift("abcdefg",3) → "abcd"
ex) strshift("abcdefg",-3) → "defg"

■ **string strdouble(double value, int option)**

double option scientific notation
, option 0 , 1

double 0.0001 "1E-4"
ex) strdouble(0.0001,0) → "1E-4"

ex) strtodouble(0.0001,1) → "0.0001"

■ **string formatNumber(double db | int i, string strFormat)**

double, int strFormat

ex) formatNumber(1213, "\$#,###") → \$1,213

■ **string convertCharCode(string src)**

ex) convertCharCode("p l a n") → plan

■ **Date setDate(Date date, string flag, int value)**

flag date value

ex) date가 "2004-06-04" setDate(date, "day", 12) → "2004-06-12"

■ **int getDate(Date date, string flag)**

flag

ex) date가 "2004-06-04" getDate(date, "day") → 4

Flag			
dayofweek	value / ,		
	1,	2, ...,	7
day	value	/	
month	value	/	
year	value	/	
hour	value	/	
minute	value	/	
second	value	/	

■ **Date parseDate(string DATE_STRING, string format)**

DATE_STRING Date

format DATE_STRING
ex) parseDate("2004-06-04", "yyyy-MM-dd")

■ **string formatDate(Date date, string format)**

date
format
ex) date가 "2004-06-04" formatDate(date, "yyyy/MM/dd") → "2004/06/04"

■ **int dateInterval(Date from, Date to)**

from to
ex) from "2004-06-04" , to가 "2004-06-06" dateInterval(from, to) → 2

■ **Date dateAdd(Date date, int day_amount)**

date day_amount
ex) date가 "2004-06-04" dateAdd(date, 2) → 2004-06-06

■ **int dateRollAndGet(string flag, int year, int month, int day, int day_amount)**

year month day day_amount
flag , flag getDate

ex) dateRollAndGet("dayofweek", 2001,12,5,30) → 6()

■ **write(argument, ...)**

(system.out) argument
argument , <Ctrl+Z>
가
ex) int i; write(i);
float f; write(f);

string

"

"

■ void setglobal("flag_name", "value")

가

global

가

value

■ string getglobal("flag_name")

setglobal

setglobal

가

ex) setglobal(" ", " ") → getglobal(" ")=" "

setglobal("abc", "3") → getglobal("abc")="3"

■ getdata(string odi_name.dataset_name.field_name, int index)

index 1

,

Index

가

■ getdata("field_name")

■ getdata("odi_name.dataset_name.field_name")

■ getdata("OZFormParam.param_name")

■ getdata("odi_name.OZParam.param_name")

■ getdata("OZSystem.sys_field_name")

, ODI

,

,

index

Page_of_Total, Total_Page

double, int, string

(1) 가 getdata "#" 가 .
 , Car.odi Order Region 가
 가 가 .

-

string FieldValue;

FieldValue = getdata("Car.Order.Region");

- #

string FieldValue;

FieldValue = #Car.Order.Region#;

(2) 'odi_name' 'dataset_name'
 " " _ " ".

■ double dbsum("odi_name.dataset_name.field_name")

■ double dbavg("odi_name.dataset_name.field_name")

■ double dbmax("odi_name.dataset_name.field_name")

■ double dbmin("odi_name.dataset_name.field_name")

■ int dbfreq("odi_name.dataset_name.field_name", "value")

"value" ()

Null ()

■ `int totalRowCount("odi_name.dataset_name")`

가 . `totalRowCount()`
가

■ `int currentRowIndex("odi_name.dataset_name")`

가 . `currentRowIndex()`
가

■ `setFieldData(<data>)`

가
<data> string, int, double, boolean, date 가 가 ,

ex) `setFieldData(3.25);` → [] 'DOUBLE'

<data>가 double " " 'DOUBLE'

SQL

SQL " " "true" 가 ,

global

■ **setQueryString("SQL String")**

SQL
#table.field# getdata(...) 가 DB
SQL

ex) string s;

s = "select * from car where Maker = ' '";

setQueryString(s)

ex) string s;

s = "select * from car where Maker = " + "" + #OZParam.Maker + """;

setQueryString(s)

■ **setattr("attr", "value")**

"attr" "value"

■ **getattr("attr")**

"attr"

■ **setcompattr("name", "attr", "value")**

"name" () (attr)

"value"

■ **getcompattr("name", "attr")**

"name" () (attr)

■ **setuserattr("attr", "value")**

(attr) "value"

■ **getuserattr("attr")**

(attr)

,

■ **setusercompattr("name", "attr", "value")**

"name"

(attr) "value"

■ **getusercompattr("name", "attr")**

"name"

(attr)

-

■ / / / /

Color		
bgcolor / fillcolor	Hexa Decimal	, , RGB hex Decimal (ddd) setattr, setcompattr 가
fgcolor / fontcolor	RGB	
framecolor /	ex) #hhhhh	
bordercolor	ex) \$ddd,ddd,ddd	
Geometry		
topline	:DOUBLE) (0	, , , : .
bottomline		
leftline		
rightline		
topborderdash		, , , : :
bottomborderdash		
leftborderdash		

rightborderdash		<pre> "["] [:["] [] ..." . " " . ex) 6 10;20 5 </pre>
topborderdashedoffset	(:INT)	<pre> , , , . </pre>
bottomborderdashedoffset		
leftborderdashedoffset		
rightborderdashedoffset		
leftpose	(:FLOAT)	<pre> , </pre>
toppose		
height	(:FLOAT)	
width		
TOPMARGIN	(:FLOAT)	<pre> , , , </pre>
BOTTOMMARGIN		
LEFTMARGIN		
RIGHTMARGIN		
preferredheight	(:FLOAT)	<pre> , , : 가 "preferredheight" 가 height . </pre>
preferredwidth		
halign	Center / Left / Right / distributed	
valign	Center / Top / Bottom / distributed	
Component Type		
drawtype	Label / Image / Barcode / User /PDF417	
paintallow	Label / Image / Barcode / User /PDF417	ex) Label, Image

Font & Display		
stretch / textdirection	Vertical / Horizontal / Vertical_2BYTE / Clockwise CounterClockwise / Horizontal_2BYTE	
writedirection	LeftToRight_TopToBottom / LeftToRight_BottomToTop / RightToLeft_TopToBottom / RightToLeft_BottomToTop	
autofontsize	true / false / largeronly / smalleronly	
autosize	true / false	
wordwrap	true / false	
wordwraptype	default / ignorespace / nonasciword	가
caption		
value		: 가
clip	true / false	(가)
effect	Basic / Shadow / Engrave / Outline / Hollow / Segments / Dimension	
spacing	(:DOUBLE)	, 0,
grouping	true / false	:

autosplit	true / false	가
transparent / nofill	true / false	
Transparency	(:INT)	, 255, 0~255
wrap space	(:DOUBLE)	, 0,
crLfToLf	true / false	ASCII 13 10 ASCII 10
fontname		
fontsize		
fontstyle	Plain / Bold / Italic / Bold&Italic	
fontstyleex	None / UnderLine / StrikeOut / DoubleStrikeOut	
shrink	true / false	
noborder	true / false	
FrameDrawingMode	Inside / Center/ Outside	
visible	true / false	
printable	true / false	
format		
Export		
Export_All	true / false	: Export_All true false ex) setattr("Export_All","true"); setattr("Export_txt","false");

Export_Nothing	true / false	: Export_Nothing true true ex) setattr("Export_Nothing"," true"); setattr("Export_txt","true");
Export_pdf	true / false	pdf
Export_xls	true / false	xls
Export_doc	true / false	doc
Export_ppt	true / false	ppt
Export_html	true / false	html
Export_csv	true / false	csv
Export_txt	true / false	txt
Export_jpg	true / false	jpg
Export_tif	true / false	tif
Export_svg	true / false	svg
Export_hml	true / false	hml
Export_Bankbook	true / false	: 가 .
Customizable On Viewer		
movable	true / false	가
editable	true / false	/ 가
changeable	true / false	가
Auto Shift		
downrelated	ex) 1, 2,...	
rightrelated	ex) 1, 2,...	

■

fieldname		

■

expression		

: caption 가 .

■

imagestyle	Normal / Center / Fit / Tile / FitByWidth / FitByHeight / Isotropic / TopCenter / TopRight / MiddleLeft / MiddleRight / BottomLeft / BottomCenter / BottomRight	

: caption URL 가 .

■

BarCode_dataposition	None / Top / Bottom	
BarCode_titleposition	None / Top / Bottom	
BarCode_datagap	(:DOUBLE)	
BarCode_titlegap	(:DOUBLE)	

BarCode_type	CODABAR / CODABAR_MOD16 / CODE11 / CODE11_MOD11 / CODE11_MOD11_MOD11 / CODE39 / CODE39_MOD43" / CODE39EXTENDED / CODE39EXTENDED_MOD 43 / CODE93 / CODE93_MOD47 / CODE93FULL / CODE93FULL_MOD47 / EAN8 / EAN8PLUS2 / EAN8PLUS5 / EAN13 / EAN13PLUS2 / EAN13PLUS5 / STANDARD2OF5 / STANDARD2OF5_MOD10 / INDUSTRIAL2OF5 / INDUSTRIAL2OF5_MOD1 0 / INTERLEAVED2OF5 / INTERLEAVED2OF5_MOD 10 / MSI / MSI_MOD10 / MSI_MOD11 / MSI_MOD10_MOD10 / MSI_MOD10_MOD11 / OPC / OPC_MOD10 / POSTNET / UPCA / UPCAPLUS2 / UPCAPLUS5 / UPCE / UPCEPLUS2 / UPCEPLUS5 / CODE128A / CODE128A_MOD103 / CODE128B / CODE128B_MOD103 / CODE128C / CODE128C_MOD103 / CODE128AUTO / CODE128AUTO_MOD103	
BarCode_halignment		
BarCode_scale	1 / 2 / ... / 9 / 10	
BarCode_aprintscale	(:INT)	

BarCode_ratio	2 / 3	
BarCode_margins	(:DOUBLE)	
BarCode_rotation	0 / 90 / 270	

■ PDF417

PDF417_ROWNUM	(:INT)	
PDF417_COLNUM	(:INT)	
PDF417_ECC	(:INT)	
PDF417_XSCALE	(:INT)	X
PDF417_YSCALE	(:INT)	Y

■

EvenHeightAtGrouping	true / false	가

■

CrossTab_fitrightmargin	None / LastHorzPage / AllPage	

■

Common		
AreaFigureColor	Hexa Decimal RGB ex) #hhhhh ex) \$ddd,ddd,ddd	RGB hex Decimal (ddd)
Chart_horizontal_axislabel_2stair	true / false	2
Chart_style		

		RGB	hexa	Decimal
Chart_color	ex) #hhhhh; ;#hhhhh ex) \$ddd,ddd,ddd; ;\$ddd,ddd, ddd		"," : (;)	.
topborderdash			,	,
bottomborderdash				
leftborderdash				
rightborderdash				
topborderdashed	(:INT)		,	,
bottomborderdashed				
leftborderdashed				
rightborderdashed				
ShowFigure	true / false			
ChartLineFigures			:	,"[]
			[]	],[
			[]	[]
			[]	..."
			.	.
			"	"
			"	"
			.	.
			ex) 3 3,5 5,33 33	

ChartAreaFigures	LeftInclined / Scissor / Horizontal / RightInclined / Plus / Vertical / LeftInclined2 / Scissor2 / Horizontal2 / RightInclined2 / Plus2 / Vertical2 / Empty	: " , " . ex) Plus,Scissor,Vertical
AreaFigureColor	ex) #hhhhhh ex) \$ddd,ddd,ddd	RGB hexa Decimal
ChartMarkFigures	Circle / Rectangle / Triangle / InvertedTriangle / Diamond / Circle_Transparent / Rectangle_Transparent / Triangle_Transparent / InvertedTriangle_Transparent / Diamond_Transparent / Snow / LongBar / ShortBar / Scissor / Plus / HorizontalLine1 / HorizontalLine2 / HorizontalLine3 / HorizontalLine4 / HorizontalLine5 / Empty / VerticalLine	: " , " . ex) Circle,Triangle,Snow
X Axis - Common		
Chart_max_#ofitem		X
Chart_period_x		X
Chart_sub_period_x	(:INT)	X , 1 1 1
Chart_tooltip_caption		() 가

Chart_tooltip_colpivot		가 (.) (value1, value2,.....) () 가 getattr 가
Chart_tooltip_contents	(:DOUBLE)	가 Y () 가 getattr 가
Chart_tooltip_rowpivot		가 X X (.) (XValue, XValue2,.....) () 가 getattr 가
Chart_tooltip_text		가 Y
Chart_tooltip_value	(:DOUBLE)	가 Y Chart_tooltip_contents Chart_tooltip_value Y
XAxisBottomTitle		X
XAxisRightTitle		X
XAxisReverse	true / false	X
X Axis - Item Type		
YCrossBetweenX	Default / Yes / No	Y()
X Axis - Date Type		
Chart_baseline_x	Min / Max /	X - MIN : X - MAX : X - (ex.2008-05-28)
Chart_max_x	Auto / (:DOUBLE)	X Auto :

Chart_min_x	Auto / (:DOUBLE)	X Auto :
Chart_origin_x	Min / Max /	X - MIN : X - MAX : X - ex) 2008-05-27
Chart_roundoff_x Chart_roundup_x	year_january / year_april / halfyear_january / halfyear_april / quarter / month / week / day / hour / minute / second	X X
Chart_unitofticks_x	year / 2year / halfyear / quarter / 2month / month / 2week / week / 2day / day/ hour/ 10minute / minute / 10second / second	X
X Axis - Number Type		
Chart_#ofticks_auto_x	true / false	X
Chart_#ofticks_x	(:INT)	X 가
Chart_baseline_x	Min / Max / (:INT)	X - MIN : X - MAX : X -
Chart_max_auto_x	true / false	X
Chart_max_x	Auto / (:DOUBLE)	X Auto :
Chart_min_auto_x	true / false	X
Chart_min_x	Auto / (:DOUBLE)	X Auto :
Chart_origin_x	Min / Max / (:DOUBLE)	X - MIN : X - MAX : X -
Chart_roundoff_x Chart_roundup_x	(:INT)	X X
Chart_unitofticks_x	(:INT)	X
Y Axis		

Chart_#ofticks_auto_y1 Chart_#ofticks_auto_y2	true / false	Y
Chart_#ofticks_y1 Chart_#ofticks_y2	(:INT)	Y (가) : "Y" " "false" .
Chart_baseline_y1 Chart_baseline_y2	Min / Max / (:INT)	Y - MIN : Y - MAX : Y -
Chart_max_auto_y1 Chart_max_auto_y2	true / false	Y
Chart_max_y1 Chart_max_y2	Auto / (:DOUBLE)	Y Auto : : "Y" " "false" .
Chart_min_auto_y1 Chart_min_auto_y2	true / false	Y
Chart_min_y1 Chart_min_y2	Auto / (:DOUBLE)	Y Auto : : "Y" " "false" .
Chart_origin_y1 Chart_origin_y2	Min / Max / (:DOUBLE)	Y - MIN : Y - MAX : Y -
Chart_period_y		Y
Chart_roundoff_y1 Chart_roundoff_y2 Chart_roundup_y1 Chart_roundup_y2	(:INT)	Y Y

Chart_sub_period_y	(:INT)	Y 1 1
Chart_uniotofticks_y1 Chart_uniotofticks_y2	(:INT)	Y
YAxisLeftReverse	true / false	Y
YaxisLeftTitle		Y
YaxisLeftTopTitle		Y
YAxisRightReverse	true / false	Y
YaxisRightTitle		Y
YaxisRightTopTitle		Y
Z Axis		
Chart_period_z		Z
Chart_sub_period_z	(:INT)	Z 1 1

		VLine_NoPoint
		VLine_Accumulative_NoPoint
	100%	VLine_Percent_NoPoint
		VLine
		VLine_Accumulative
	100%	VLine_Percent
		VLine_3D

		VLine_Rotational_3D
		VLine_3D_Zwise
		VLine_Rotational_3D_Zwise
가		
		HLine_NoPoint
		HLine_Accumulative_NoPoint
	100%	HLine_Percent_NoPoint
		HLine
		HLine_Accumulative
	100%	HLine_Percent
		VBar
		VBar_Accumulative
	100%	VBar_Percent
		VBar_3D_Bundle
		VBar_3D_Accumulative
	100%	VBar_3D_Percent
		VBar_3D

		VBar_Rotational_3D
		VBar_3D_Zwise
		VBar_Rotational_3D_Zwise
가		
	가	HBar_Bundle
	가	HBar_Accumulative
	100% 가	HBar_Percent
	가	HBar_3D_Bundle
	가	HBar_3D_Accumulative
	100% 가	HBar_3D_Percent
		VCylinder
		VCylinder_Accumulative
	100%	VCylinder_Percent
		VCylinder_3D_Bundle
		VCylinder_3D_Accumulative
	100%	VCylinder_3D_Percent
		VCylinder_3D

		VCylinder_3D_Zwise
가		
	가	HCylinder
	가	HCylinder_Accumulative
	100% 가	HCylinder_Percent
	가	HCylinder_3D_Bundle
	가	HCylinder_3D_Accumulative
	100% 가	HCylinder_3D_Percent
		VCone_3D_Bundle
		VCone_3D_Accumulative
	100%	VCone_3D_Percent
	가	HCone_3D_Bundle
	가	HCone_3D_Accumulative
	100% 가	HCone_3D_Percent
		VCone_3D
		VCone_3D_Zwise

		VPyramid_3D_Bundle
		VPyramid_3D_Accumulative
	100%	VPyramid_3D_Percent
	가	HPyramid_3D_Bundle
	가	HPyramid_3D_Accumulative
	100% 가	HPyramid_3D_Percent
		VPyramid_3D
		VPyramid_3D_Zwise
		VArea
		VArea_Accumulative
	100%	VArea_Percent
		VArea_3D
		VArea_3D_Accumulative
	100%	VArea_3D_Percent
		VArea_Rotational_3D
		VArea_3D_Zwise

		VArea_Rotational_3D_Zwise
가		
		HArea
		HArea_Accumulative
	100%	HArea_Percent
		HArea_3D_Accumulative
	100%	HArea_3D_Percent
		VPoint
		HPoint
		Pie
		Pie_Split
		Pie_3D
		Pie_Split_3D
		Gauge
		Radiant_NoPoint

		Radiant_Accumulative_NoPoint
		Radiant_Percent_NoPoint
		Radiant
		Radiant_Accumulative
		Radiant_Percent
		VStep
		HStep
		VCustom
		VCustom_Accumulative
	100%	VCustom_Percent
		HCustom
		HCustom_Accumulative
	100%	HCustom_Percent

■

setattr 가 .

--	--	--

Gantt_startdate	Auto / Parameter	- AUTO : - Parameter : gt_fromDate
Gantt_enddate	Auto / Parameter	- AUTO : - Parameter : gt_toDate
Gantt_taskbartype	Separated / United	- Separated : 가 - United : 가
Gantt_timescale	Year / Quarter / Month / Week / Day	, , , ,
Gantt_weektype	Sun-Mon / Mon-Sun	,



autosize	true / false	: / , .
enable	true / false	: "false" 가 가 .
visible	true / false	: "false" .
height	(:INT)	: , , height .
width	(:INT)	: width .

forcenewpage	true / false	:
datasetname		
emptydataband	true / false	: getattr, getcompattr, getuserattr, getusercompattr 가
pageendstop	true / false	가 가 : 가 .
repeatnum	(:INT)	: , , 가 .

■

Region_hgap	(:FLOAT)	
Region_vgap	(:FLOAT)	

■

ROUND	(:FLOAT)	
LINETYPE	Horizontal / Vertical / Slash / Backslash	
THICKNESS	(:FLOAT)	
DASH	(:FLOAT)	(GAP)
GAP	(:FLOAT)	(DASH)
ARROWARROWSIZE	(:FLOAT)	
ARROWTYPE	1 / 2 / 3 / 4 / 5 / 6	1 : , 2 : 3 : , 4 : 5 : , 6 :

ARROWDIRECT	1 / 2 / 3	1 : , 2 : 3 :
-------------	-----------	------------------



Protocol	POST / GET	
URL		(ASP, JSP) URL
Checked	true / false	
SelectedIdx	(:INT)	
GroupName		

depth , 0 .

■ string getColPivot(int depth)

depth pivot , 가 가 0 1 가 .

■ string getRowPivot(int depth)

depth pivot , 가 가 0 1 가 .

■ double getSummary("SUM"|"AVG"|"MIN"|"MAX", string rowpivot0, string rowpivot1,...,string colpivot0,string colpivot2,...) (sum, avg, min, max)

sum non, cnt ,

0

CTValueShape 가 ,

가

ex) 2 , 2

```

string rp0, rp1, co0, cp1;
rp0=getRowPivot(0)
rp1=getRowPivot(1)
cp0=getColPivot(0)
cp1=getColPivot(1)
getSummary("SUM", rp0, rp1, cp0, cp1); → , sum
getSummary("AVG", rp0, rp1); → AVG
getSummary("MAX", "", "", cp0, cp1); → MAX (
empty string
MAX )
getSummary("MIN"); → value MIN
    
```

ex)

Sample		현대			대우			합계
		소나타	그랜저	합계	누비라	레간자	합계	
전라	전주	9 2	10 3	24,0	6 5 3		14,0	38,0
	광주		2 4	6,0	4 6	6 7	23,0	29,0
	합계	11,0	19,0	30,0	24,0	13,0	37,0	67,0
충청	대전	3 4	4 3	14,0	1 8		9,0	23,0
	충주	9	8 9 8	34,0	7 0	9 7	23,0	57,0
	합계	16,0	32,0	48,0	16,0	16,0	32,0	80,0
합계		27,0	51,0	78,0	40,0	29,0	69,0	147,0

```

getSummary("SUM", " ", " ", " ", " ", " ") → 11.0
getSummary("SUM", " ", " ", " ") → 38.0
getSummary("SUM", " ", " ", " ") → 67.0 ( " "
" "
" " sum )
getSummary("SUM", "", "", " ", " ") → 51.0
getSummary("SUM") → 147.0
    
```

- void Pivot(int fromAxis, int fromDepth,int toAxis, int toDepth)
- void Pivot(String fromAxis, int fromDepth,String toAxis, int toDepth)

Axis : (/), 0 , 1

Depth : , 0

- void removePivot(int Axis, int Depth)
- void removePivot(String Axis, int Depth)

Axis : (/), 0 , 1

Depth : , 0

- boolean isSpaceRemained(double height)

height

'true', 'false'

height 0 height

가

isSpaceRemained(0)가 false 가 가

- double getsystem("empty_space")

가

가

Pixel

■ void msgBox("title", "msg")

title :

msg :

■ encodeURI("value")

URI

) encodeURI("!@#\$%^&*")

: encodeURI 가 URI

setLinkServer, setLinkServlet, setLinkURL 가
가
가 setLinkParam, setLinkOption

■ setLinkServer("host_name/host_IP", port_num, "report_file_name")

■ setLinkServlet("servlet_url", "report_file_name")

,
port_num
,
" ()"
report_file_name
, host_name/host_IP "" , port_num 0
servlet_url ""

■ setLinkParam("OZFormParam_name", "value")

가 ,
setLinkParam() , ODI setLinkOption()

■ setLinkOption("option_tag", "value")

ODI

ex) ODI

```
setLinkOption("odi.odinames", "sample1");
setLinkOption("odi.sample1.pcount", "2");
setLinkOption("odi.sample1.args1", "FromDate=2004-01-01");
setLinkOption("odi.sample1.args2", "ToDate=2004-01-31");
```

가 .

option_tag	value	
refreshperiod	hh:mm:ss	: :
refreshcache	true / false	(: false)
compressedForm	true / false	
odi.odi_name.usescheduled data		가
displayname		
openfile		PC
presavedata	true / false	가 (: false)
usesecurity	true / false	(: false)
largebundle	true / false	(: false)

■ setLinkURL("url", "target")

target URL
url : URL , ex) http://www.forcs.com
target :


target	Stand-Alone	
_self	URL	가 URL
_parent	URL _self	가 URL _self
_top	URL 가 _self	가 URL _self
_blank	URL	
	URL	

■ SetLinkPostURL("url", "target", "postparam")

target URL POST
가 StandAlone "target" "_blank"
가
url : URL , ex) http://www.forcs.com
target :
postparam : post

■ setLinkToc("tocName")

Tree 가 ,
tocName : . 가 "/"
ex) Tree

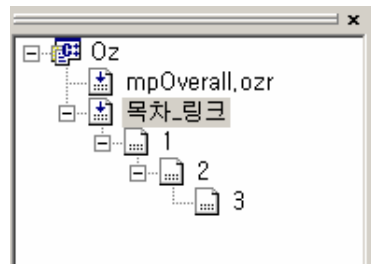

"3"

```
setLinkToc(" _ /1/2/3");
```

■ setLinkRepository("url", "mode")

setLinkRepository 가

URL :) ozp://test.xls, ozp://category/test.xls

mode :

mode	
run	
save	
choice	/ /

) test.xls

```
setLinkRepository("ozp://test.xls", "run")
```

■ setLinkExecute("cmd", "parameter")

cmd :

parameter :

) test.txt

```
setLinkExecute("notepad.exe", "c://test.txt")
```

■ setBrowserOption("option_tag", "value")

가

가

option_tag	value	
ShowToolbar	true / false	(: true)

ShowStatusBar	true / false	(: true)
ShowMenuBar	true / false	(: true)
ShowAddressBar	true / false	(: true)
Left	"< INT >"	
Top	"< INT >"	
Width	"< INT >"	
Height	"< INT >"	

```

: setBrowserOption "setLinkPostURL"
"setLinkURL" 가
.

)
setLinkPostURL("www.forcs.com", "_blank");
setBrowserOption("ShowToolbar","false");

```

■ setLinkEvent("UserTag", "UserValue")

(OZLinkCommand, OZUserActionCommand)

UserTag :

UserValue :

■ setReportOption("option_tag", "value")

HTML , 가

ex) setReportOption("connection.pcount","3")

setReportOption() 가 .


	가
connection	args#, clientdmtype, compresseddatamodule, displayname, fetchtype, pageque, pcount, refreshcache, refreshperiod, serverdmtype, usescheduleddata
csv	exceptfirstpage, filename, pagetitle, pageline, pagestyle, path, removerange, savetointeger, separator
export	applyformat, confirmsave, filename, format, lockcontrols, mode, onlydata, path
excel	arrangestyle, exceptfirstpage, filename, matchmode, matchsubmode, numberformat, path, removeblank, removeoption, removerange, savetointeger
han97	filename, path, saveastable
hml	filename, keeplabelsize, path, saveastable, savetobackground, savetoheaderfooter, verttopparagraph
hdm	indent, separator
html	filename, horizontal, imagepath, offsetx, offsety, path, savebypage, vertical
information	debug, turnoffdynamic
jpg	filename, path
memo	bordercolor, bottomline, caption, clip, effect, halign, fillcolor, fontcolor, fontname, fontsize, fontstyle, leftline, rightline, spacing, stretch, topline, valign, wordwrap, wrapspace
odi	odinaes, odiname.args#, odiname.clientdmtype, diname.fetchtype, odiname.pcount, odiname.serverdmtype
ozd	filename, memoallowed, path, password, saveall
pdf	author, creator, filename, keyword, masterpassword, path, printable, saverange, title, userpassword, subject
ppt	filename, path
print	adjust, alldocument, close, collate, copies, ignoreerror, lockopt, mode, once, pageorder, pageorient, pagerange, pages, pagesinone, printbypage, printername, size, spoolpages, style, usedefaultpaper, usedialogopt
svg	filename, path
text	exceptfirstpage, filename, pagetitle, pageline, pagestyle, path, removerange, separator, savetointeger
tiff	encode, filename, path
toolbar	position, iconwidth, iconheight, iconposition, bgcolor,

	useseparator, all, file, open, print, save, option, showtree, refresh, addmemo, inputparameter, find, savednm pageselection, pagenavigator, top, up, bottom, down, leftmost, left, rightmost, right, zoom, zoomout, zoomin, zoomtype, zoomreset, about, close
viewer	addmarginleft, addmargintop, bgcolor, bgimage, editmodecolor, frameheight, framewidth, framex, framey, marginleft, margintop, progresscommand, showtree, smartframesize, useeditmode, useinborder, useoutborder, usestatusbar, zoom
word	filename, path

USL


- `getUSLServerParam("name")`

```
USL                                     가      .      가
    ""
) getUSLServerParam("OZUSL_SERVER_URL")
```

SQL setQueryString("SQL String")

" " "true"

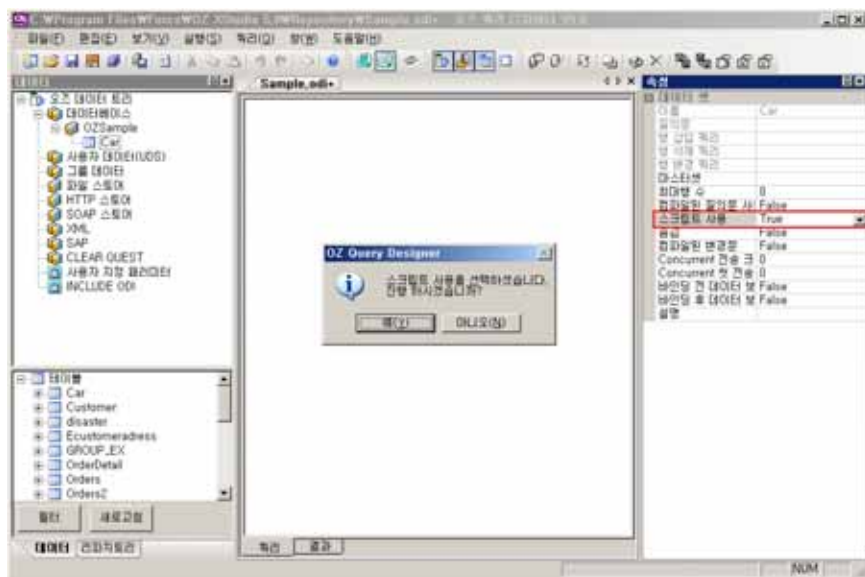

[]

SQL


setQueryString SQL
ODI MakerCode (:INTEGER) 가
" " " "

```
string s;  
s = "select * from car";
```


```
if(#OZParam.MakerCode# == 1) {
    s = s + " where Maker = '      '";
} else if(#OZParam.MakerCode# == 2) {
    s = s + " where Maker = '      '";
} else {
    s = s + " where Maker = '      '";
}
setQueryString(s);
```




ODI

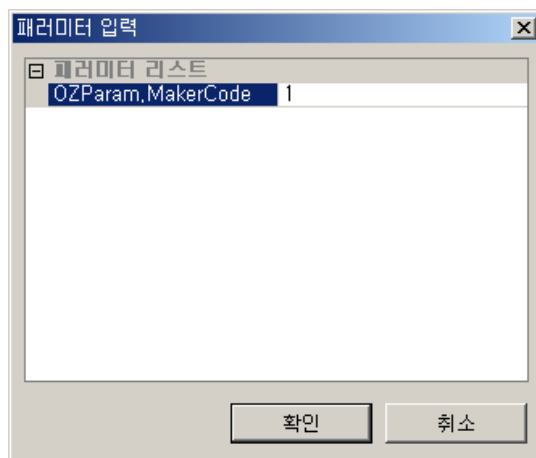


[]

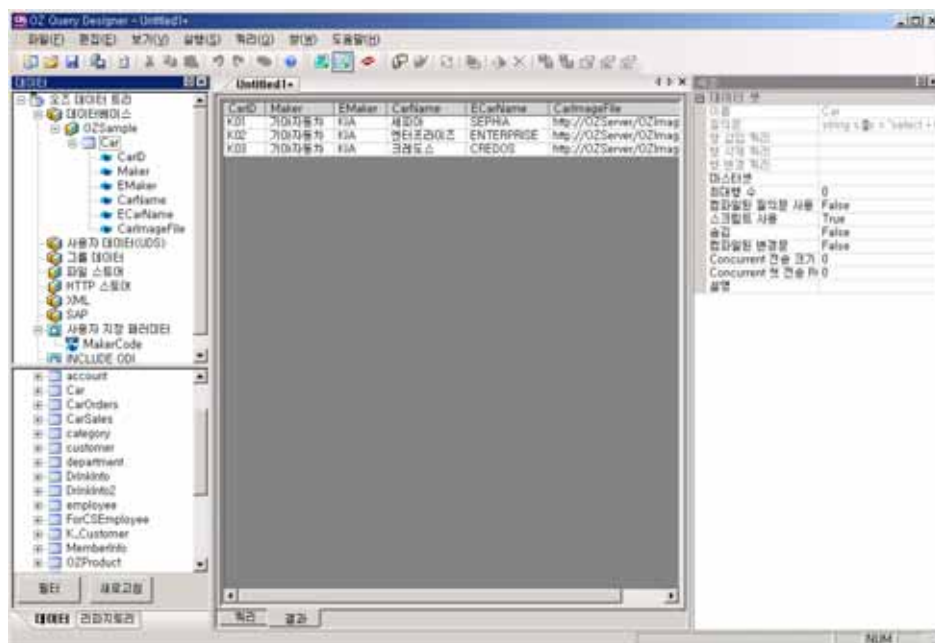

가 가 ,
 setFieldData(<data>)
 가 ,
 [가]

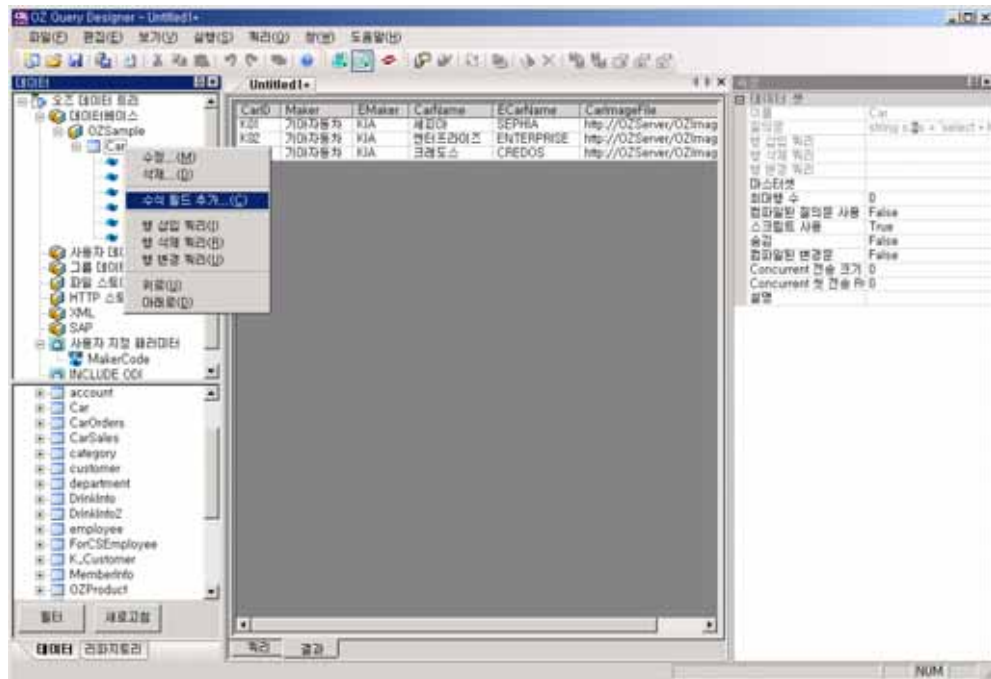


가

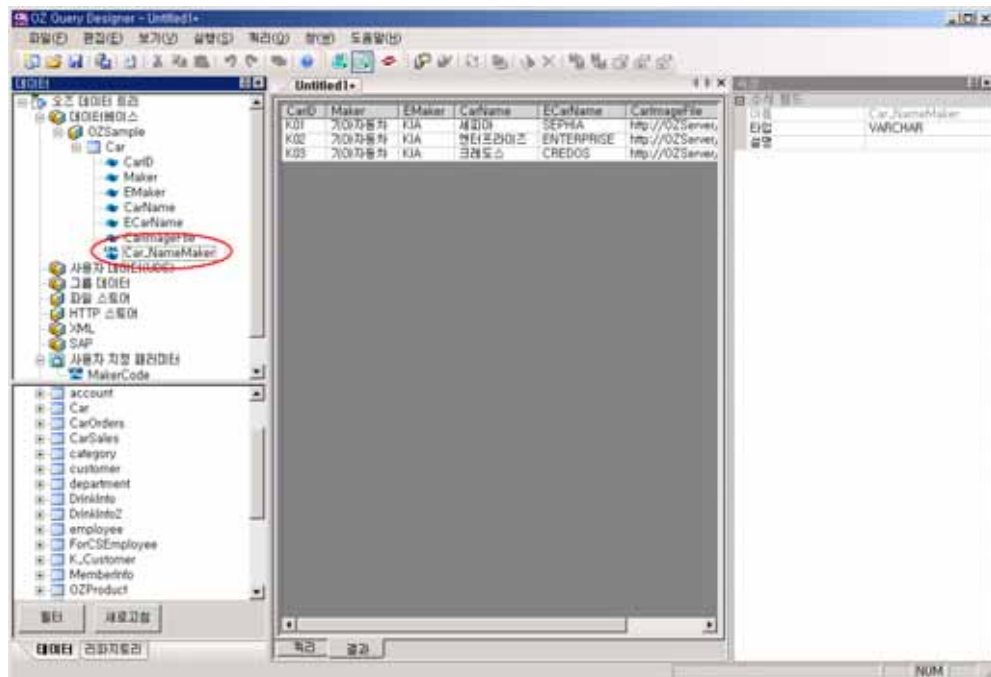


가

가 가 가


가 [가]

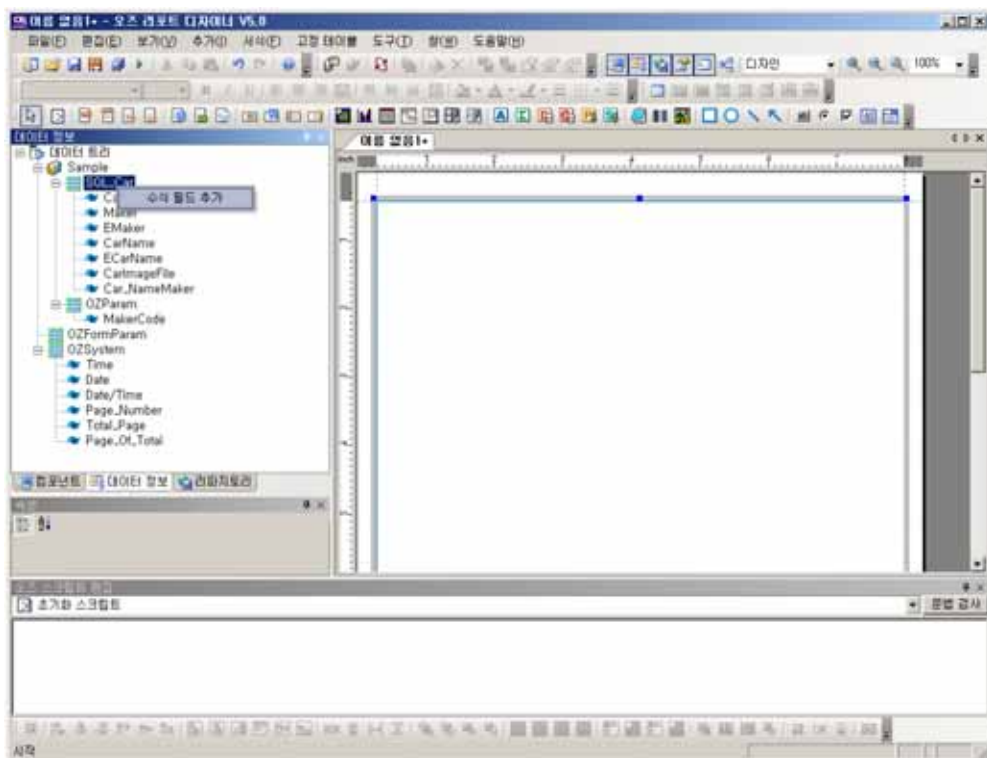

가 []

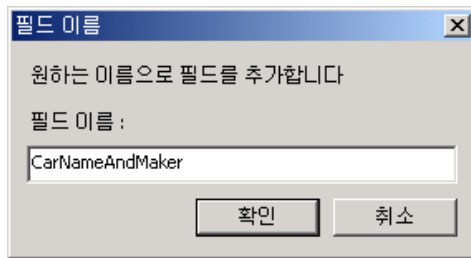

가 []

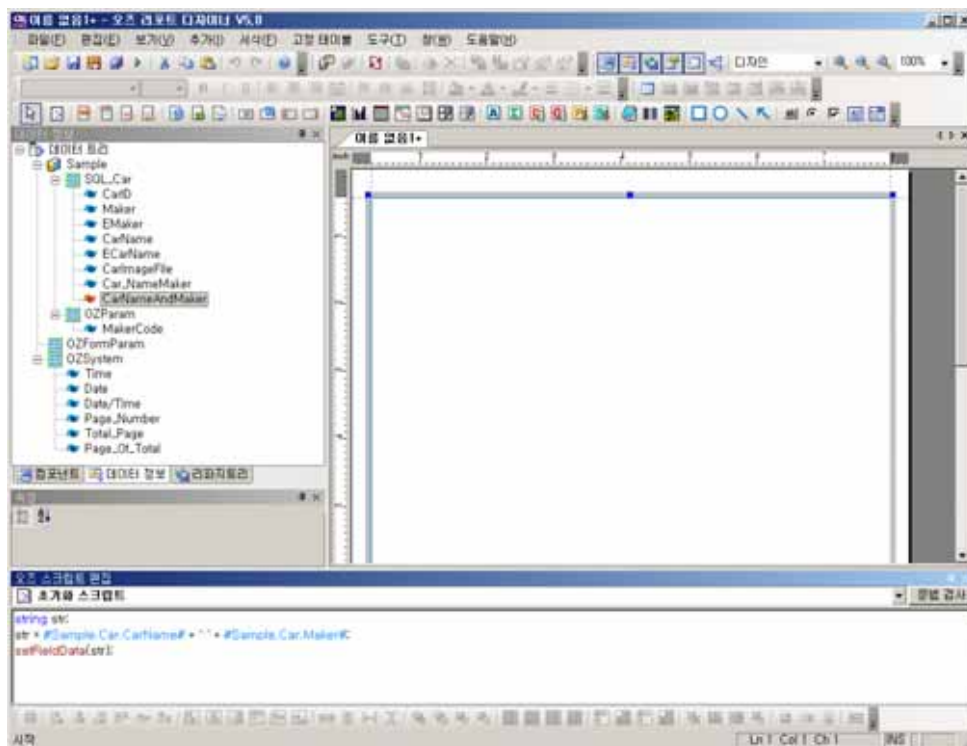


```
string str;
str = #Sample.Car.CarName# + " " + #Sample.Car.Maker#;
setFieldData(str);
```


[] 가

가

[


]

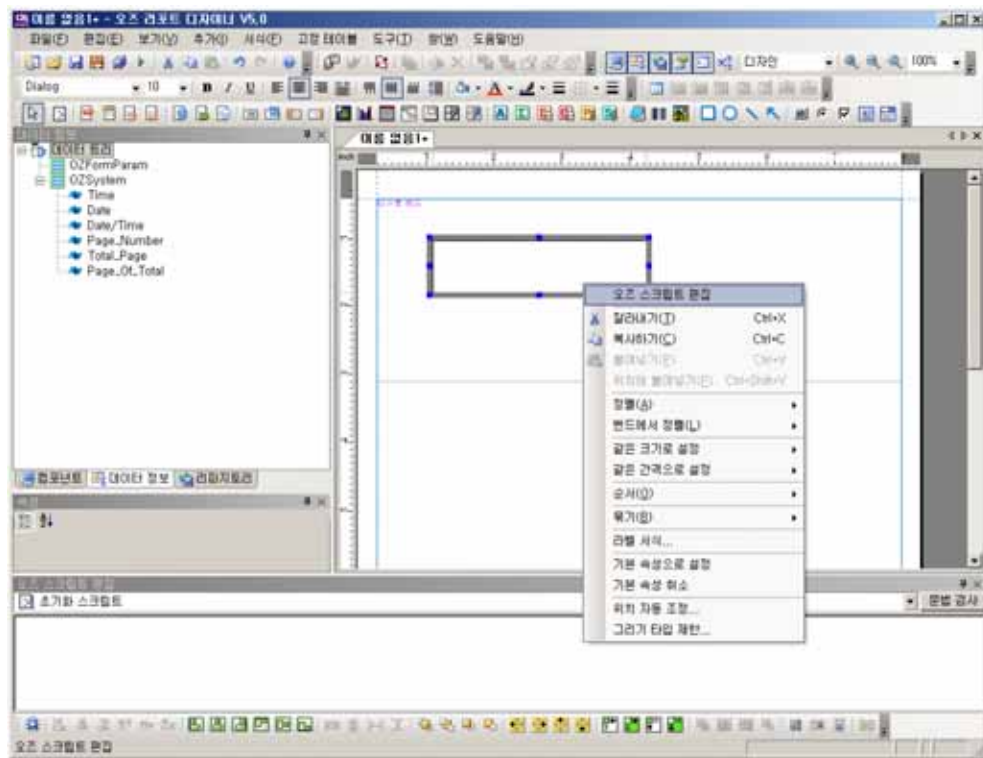



가 . SQL 가

가

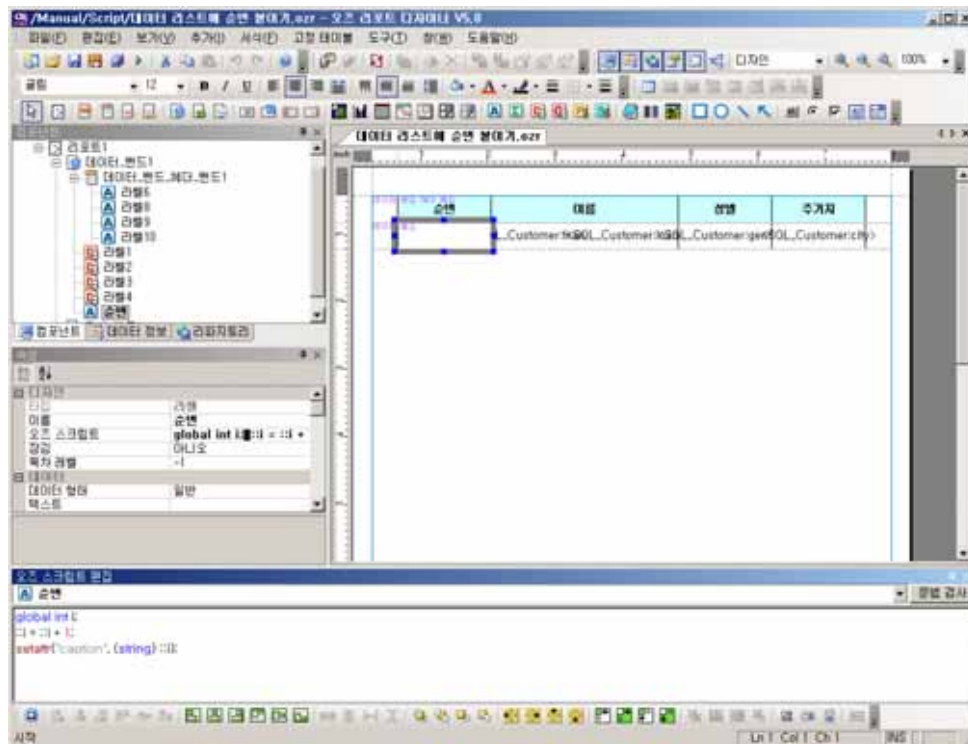


```
global int i;
::i = ::i + 1;
setattr("caption", (string) ::i);
```



순번	이름	성별	주거지
1	Zach Lovell	M	San Andres
2	Mary Borden	M	Santa Monica
3	Louis Gomez	F	Yakima
4	Gordon Kirschner	F	Arcadia
5	Lana Blau	M	Novato
6	Patricia Goldberg	M	Woodburn
7	Paula Duran	M	Richmond
8	Angela Bowers	M	Acapulco
9	Sylvester Valdez	M	National City
10	Steve Berger	F	Bellingham
11	Rachel Minarick	F	Woodburn
12	Christine Sandy Kurtz	M	Vancouver
13	Darwin Malaby	M	W. Linn
14	Ralph McCoy	F	Camacho
15	John Baker	F	Los Angeles

가

가

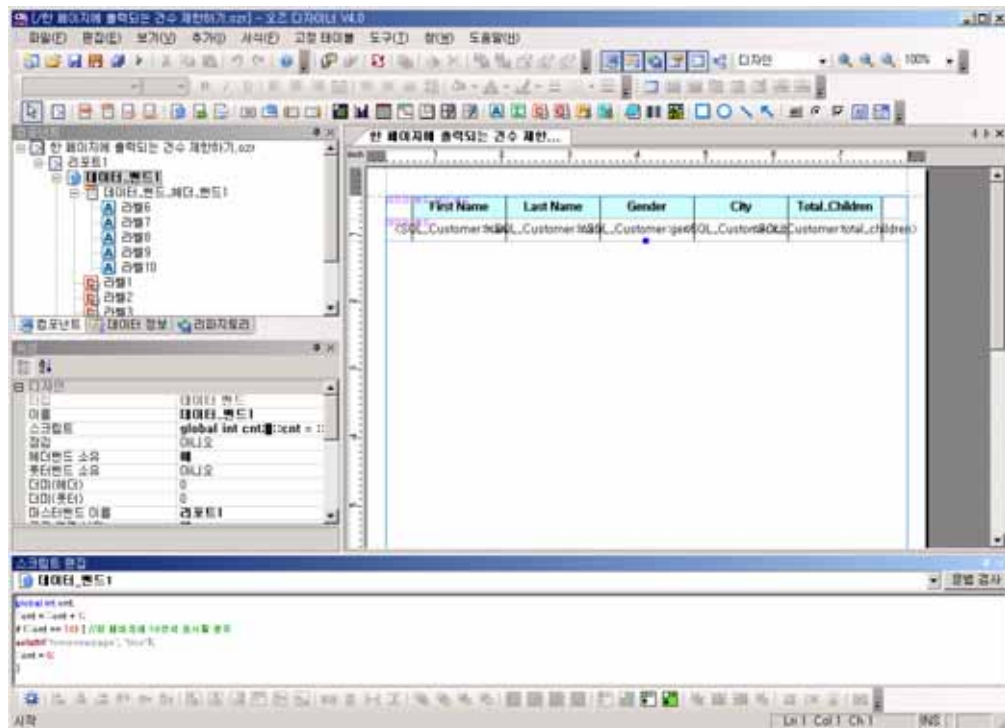

```
global int cnt;
::cnt = ::cnt + 1;
if (::cnt == 10) { // 10
setattr("forcenewpage", "true");
::cnt = 0;
}
```


OZ 브라우저
파일(F) 보기 도움말(H)

First Name	Last Name	Gender	City	Total_Children
Michael	Spence	M	Burnaby	4.0
Brenda	Blumberg	M	Richmond	5.0
Beverly	Baker	F	Spring Valley	2.0
Pedro	Castillo	M	Renton	1.0
Jose	Bernard	M	Burbank	0.0
Kevin	Armstrong	F	Oak Bay	2.0
Eric	Long	F	Ladner	2.0
Donna	Arnold	M	Oregon City	1.0
Paul	Tays	M	Oak Bay	4.0
Gary	Dumin	M	Grossmont	3.0

준비 메시지 1 / 12

Imperial Beach	3.0
Beaverton	4.0
Matchosin	0.0
Los Angeles	1.0
La Cruz	5.0
Shawnee	5.0
Port Orchard	1.0
Downey	2.0
Milwaukee	2.0
Richmond	4.0

준비 메시지 2 / 12

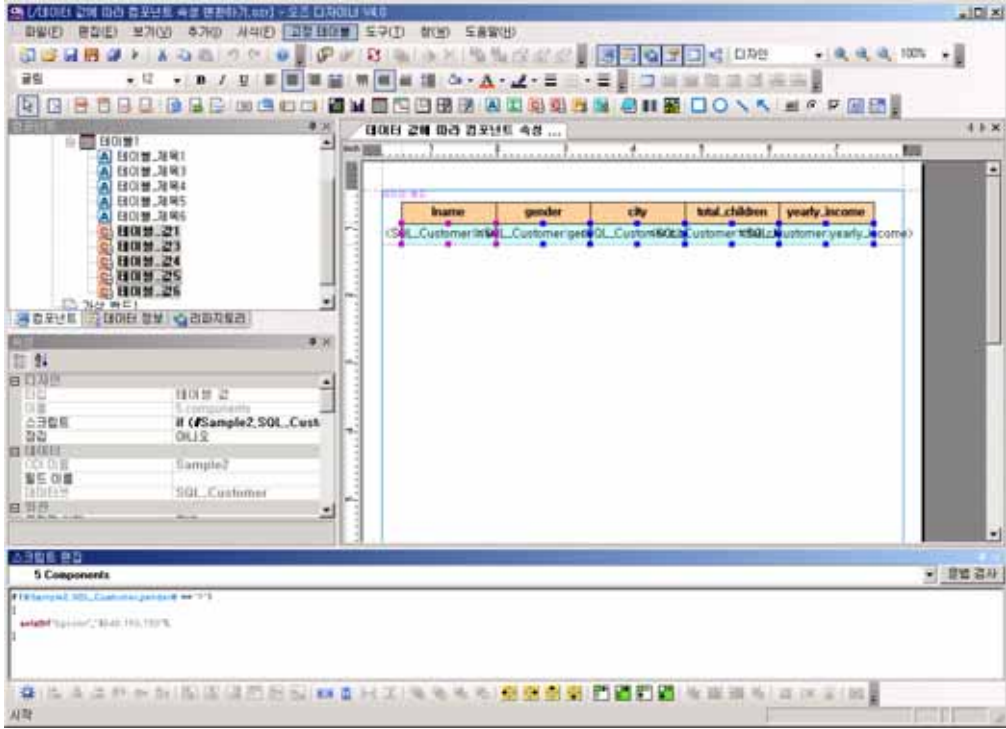

```
if (#Sample2.SQL_Customer.gender# == "F")
{
    setattr("bgcolor", "$240,150,150");
}
```




The screenshot shows a window titled "OZ 뷰어" (OZ Viewer) with a menu bar containing "파일(F)", "보기", and "도움말(H)". The main area displays a table with 5 columns: "lname", "gender", "city", "total_children", and "yearly_income". The table contains 16 rows of data, alternating between light blue and light red backgrounds. The status bar at the bottom shows "준비" (Ready), "메시지" (Message), and "1 / 1".

lname	gender	city	total_children	yearly_income
Lowell	M	San Andres	3.0	\$10K - \$30K
Borden	M	Santa Monica	1.0	\$30K - \$50K
Gomez	F	Yakima	4.0	\$30K - \$50K
Kirschner	F	Arcadia	3.0	\$110K - \$130K
Blau	M	Novato	3.0	\$30K - \$50K
Goldberg	M	Woodburn	5.0	\$130K - \$150K
Duran	M	Richmond	4.0	\$50K - \$70K
Bowers	M	Acapulco	5.0	\$50K - \$70K
Valdez	M	National City	3.0	\$150K +
Berger	F	Bellingham	3.0	\$50K - \$70K
Minarick	F	Woodburn	2.0	\$130K - \$150K
Sandy Kurtz	M	Vancouver	5.0	\$130K - \$150K
Malaby	M	W. Linn	5.0	\$50K - \$70K
Mccoy	F	Camacho	1.0	\$110K - \$130K
Baker	F	Los Angeles	5.0	\$130K - \$150K
Alexander	M	Richmond	4.0	\$30K - \$50K
McCoy	F	Langford	4.0	\$50K - \$70K

가 2

가

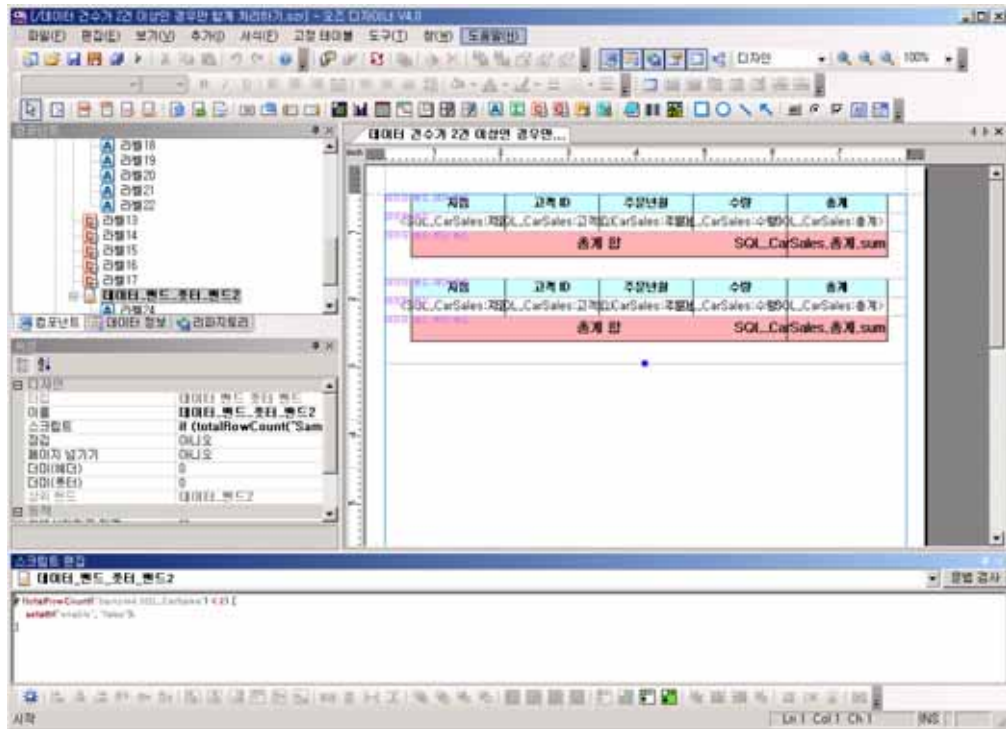

— — — 2 가 2

```
if (totalRowCount("Sample4.SQL_CarSales") < 2) {
    setattr("enable", "false");
}
```


가

The screenshot shows a web application window titled 'OZ 뷰어' (OZ Viewer). It contains two tables of order data. The first table has a red header row and a red footer row. The second table has a blue header row and a blue footer row. Both tables show order details for '강북' (Gangbuk) with a total amount of 700,000.0.

지점	고객 ID	주문년월	수량	총계
강북	3.0	2004/07	20.0	700000.0
총계 합				700000.0

지점	고객 ID	주문년월	수량	총계
강북	3.0	2004/07	20.0	700000.0

가 가

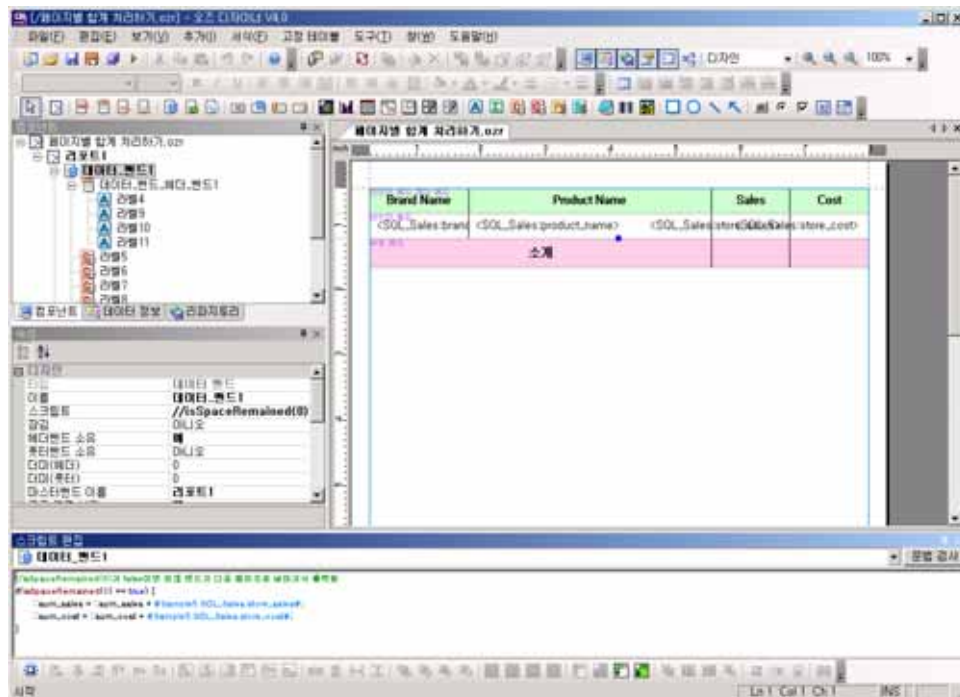

1

```
global double sum_sales, sum_cost;
```

1

```
if(isSpaceRemained(0) == true) {
    ::sum_sales = ::sum_sales + #Sample5.SQL_Sales.store_sales#;
    ::sum_cost = ::sum_cost + #Sample5.SQL_Sales.store_cost#;
}
//isSpaceRemained(0)가 false          가          가
```

```
setattr("caption", formatNumber(::sum_sales, "###.###"));
::sum_sales = #Sample5.SQL_Sales.store_sales#;
```

```
setattr("caption", formatNumber(::sum_cost, "###.###"));
::sum_cost = #Sample5.SQL_Sales.store_cost#;
```

가

OZ 뷰어

파일(F) 보기 도움말(H)

Category	Product Name	Cost	Price
Blue Label	Blue Label Fancy Canned Oysters	2.2100	.9282
Fabulous	Fabulous Cola	1.7800	.6934
High Top	High Top Baby Onion	3.4500	1.4145
Best Choice	Best Choice Cheese Dip	3.5500	1.3135
Boffer	Boffer Fancy Canned Clams	4.2200	1.5614
Fabulous	Fabulous Cranberry Juice	.6500	.2990
Fast	Fast Dried Apples	8.2800	2.7832
Fast	Fast Grape Fruit Roll	1.8000	.5440
Red Spade	Red Spade Roasted Chicken	2.7800	1.1393
Red Wing	Red Wing 100 Watt Lightbulb	1.5400	.5032
Club	Club Head Cheese	2.9400	.9114
Mama	Mama Cole Slaw	4.8800	2.1438
소계		86.43	34.5357

준비 메시지

Category	Product Name	Cost	Price
Golden	Golden Frozen Corn	5.4300	2.7150
Red Wing	Red Wing Large Sponge	2.9200	1.1972
소계		122.25	48.8758

준비 메시지

10

가 10

10

가

```
/* ( ).... */
```

```

global int i;    //
::i = 0;        //      가      0

/*      (      ).... */
:: i = ::i +1;    //      가      1      .
if(::i%10 == 0) setattr("forcenewpage","true");
//      10      가 10
      가 0      .

/*      .... */
int repeatnum; //

if(::i%10 ==0)
  setattr("visible","false");
//      가 10      가      .
}else {
  repeatnum = 10 - (::i%10);
  setattr("repeatnum",repeatnum);
//      가 10      .
}

setattr("forcenewpage","true");
//      가      가      [      ]      ' '
      가      가      .

```

Enable/Disable

1

가 .

```

if (#ODI_name.DS.Value# == 1)
  setattr("repeatnum", (string)::repeatnum);
else
  setattr("enable", "false");

```

(CustID)

■) 가

```
setLinkServer("127.0.0.1", 8003, " .ozr");
setLinkOption("displayname", #CustomerName# + " ");
setLinkOption("odi.odinames", " ");
setLinkOption("odi. .pcount", "1");
setLinkOption("odi. .args1", "CustID="+ (string)#CustomerID#);
```

■) 가

```
setLinkServlet("http://oz.forcs.com:8001/app/oz/server", " .ozr");
setLinkOption("displayname", #CustomerName# + " ");
setLinkOption("odi.odinames", " ");
setLinkOption("odi. .pcount", "1");
setLinkOption("odi. .args1", "CustID="+ (string)#CustomerID#);
```

■) 가 , 가

```
setLinkServer("211.116.251.115", 8003, " .ozr");
setLinkOption("displayname", #CustomerName# + " ");
setLinkOption("odi.odinames", " ");
setLinkOption("odi. .pcount", "2");
setLinkOption("odi. .args1", "CustID="+ (string)#CustomerID#);
setLinkOption("odi. .args2", "CustName="+ #CustomerName#);
```

■) HyperLink

```
setattr("caption", "http://www.forcs.com/");
setLinkURL("http://www.forcs.com", "_blank");
```

가 .

가 .

```
global int i;
::i = ::i + 1;
```

가 .

```
if(::i == 1){
  setattr("caption","file:/c:/ozimage/1.jpg");
}
else if(::i == 2){
  setattr("caption","file:/c:/ozimage/2.jpg");
}
else if(::i == 3){
  setattr("caption","file://c:/ozimage/3.jpg");
}
else if(::i == 4){
  setattr("caption","file://c:/ozimage/4.jpg");
}
```

10 가 . type "Timestamp"

가 .

```
Date date;
date = dateAdd(d,10);
setFieldData(date);
```

i ,
.
가 .

```
int i;
i=#OZFormParam.cond#;
if (i==1){
setattr("caption","http://localhost/web.gif");
}
else if (i==2) {
setattr("drawtype","Label");
setattr("caption","JVM Download file - Press double click this band");
setLinkURL("http://localhost/msjavx86_3802.exe","_self");
}
```

가 가
.
가 .

```
int i,t;
i=#tODI.DS.evaluate#;
t = t+1;
if(t >i) setattr("enable","false");
```

()

가 .

```
Date dd;
string str;
str = formatDate(dd, "yyyy-MM-dd");
setattr("caption", str);
```

DB **String** **Date**

String

.

가 .

```
Date dd;
string str;
dd = parseDate(getattr("caption"), "yyyyMMdd");
//          Date

str = formatDate(dd, "yyyy-MM-dd");
//Date

setattr("caption", str);
```

가 .

Y .

■

```
setattr("Chart_unitofticks_y1" , "5");
setattr("Chart_unitofticks_y2", "20");
```

■ (가)

```
setattr("Chart_#ofticks_y1", "100");
setattr("Chart_#ofticks_y2", "100");
```

■

```
setattr("Chart_origin_y1", "Max");
setattr("Chart_origin_y2", "Min");
setattr("Chart_origin_y1", "100");
```

■

```
setattr("Chart_min_y1", "50");
setattr("Chart_min_y2", "Auto");
```

■

```
setattr("Chart_max_y1", "60");
setattr("Chart_max_y2", "Auto");
```

■ (value 10 .)

```
setattr("Chart_roundup_y1", "2"); → 10
setattr("Chart_roundup_y2", "3"); → 100
```

■

```
setattr("Chart_roundoff_y1", "1"); → 1
setattr("Chart_roundoff_y2", "2"); → 10
```

가 . (, , ...)

가 가 .

가 가 .

Chart_tooltip_caption	tooltip
Chart_tooltip_contents	Y

Chart_tooltip_rowpivot	X
Chart_tooltip_colpivot	

: () 가 , chart_tooltip_caption
getattr .

■

가

```
setLinkServer("211.123.456.789",8008,"sub_chart.xml");
setLinkParam("sub_chart_yvalue", getattr("Chart_tooltip_contents"));
setLinkParam("sub_chart_xvalue", getattr("Chart_tooltip_rowpivot"));
setLinkParam("sub_chart_lvalue", getattr("Chart_tooltip_colpivot"));
```

■

```
setattr("chart_tooltip_caption", "Y =" +getattr("chart_tooltip_contents")+"\n"
+"x =" +getattr("chart_tooltip_rowpivot")+"\n"+"
="+getattr("chart_tooltip_colpivot"));
```

가 .

■

```
//
setattr("Gantt_startdate","Parameter");
//
setattr("Gantt_enddate","Parameter");
```

: Parameter gt_fromDate, gt_toDate
가 .

■

: "Separated" / "United"

```
setattr("Gantt_taskbartype", "separated");
```

- : "Year"/"Quarter"/"Month"/"Week"/"Day"

```
setattr("Gantt_timescale", "Week");
```

- : "Sun-Mon" / "Mon-Sun"

```
setattr("Gantt_weektype", "Sun-Mon");
```